

Specification

Client Name :
客户名称 : _____

Client P/N :
客户品号 : _____

Product P/N :
产品型号 : _____LM14AN8-5C2B11

Sending Date:
送样日期 : _____

Client approval 客户审核		approval 审核		
Approval 核准	Audit 确认	Approval 核准	Audit 确认	Confirmation 制作
☐ Qualified 接受		☐ Disqualified 不接受		DATE: 日期 :

ADD:Building 3,Baoshi East Road,Shiyan,Bao'an District,
Shenzhen City,Guangdong Province,China 518108

地址：深圳市宝安区石岩街道官田社区宝石东路鑫基工业园3栋3楼

电话：86-755-29515966

传真：86-755-27620835


Http://www.ledi-led.com

深圳市乐的光电照明有限公司


shen zhen ledi lighting optoelectronic Co.,Ltd

1.Part code 产品型号命名原则

$\frac{L}{①}$ $\frac{M}{②}$ $\frac{14A}{③}$ $\frac{N}{④}$ $\frac{8}{⑤}$ — $\frac{5C}{⑥}$ $\frac{2B}{⑦}$ $\frac{11}{⑧}$



- ① Product line code 公司代码
- ② Product code base plate 产品基板代码
- ③ Substrate size 基板尺寸
- ④ Emitting light colors 发光颜色
- ⑤ CRI 显色指数
- ⑥ The number of series Circuit 串联电路数
- ⑦ The number of parallel Circuit 并联电路数
- ⑧ Luminous surface diameter 发光面直径



ATTENTION注意
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES
请勿裸手接触器件

2.Features 特点

- Dimension 13.5mm× 13.5mm × 1.5mm
尺寸 13.5mm × 13.5mm× 1.5mm
- CRI: Ra 80 显色指数：80
- Wide viewing angle : 120° 发光角度：120°
- RoHS compliant (ROHS标准)
- sulphation corrosion resistance 抗硫化
- Manual Soldering 手工焊接



3.Applications 应用

- Down light 筒灯
- Spotlight 射灯

4.Package Dimensions封装尺寸

Tolerance unless otherwise specified: $\pm 0.1\text{mm}$.

尺寸公差为 ± 0.1 毫米除非另有说明

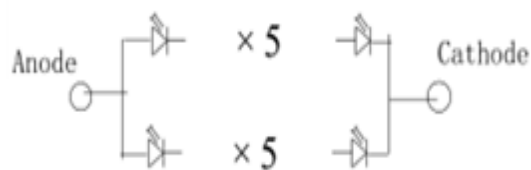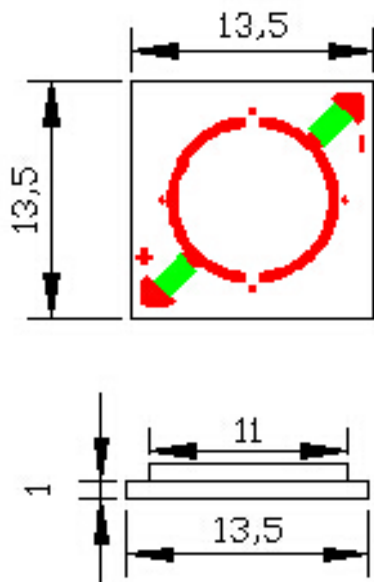

5.Performance 性能

(1) Absolute Maximum Ratings 绝对最大额定值

Parameter (参数)	Symbol (符号)	Ratings (数值)	Units (单位)
Power Dissipation (功率)	1	3	W
Continuous Forward Current (正向输入电流)	I_F	150	mA
Peak Forward Current ^[2] (顺向脉冲电流)	$I_F(\text{Peak})$	250	mA
LED Junction Temperature (结点温度)	T_J	120	$^{\circ}\text{C}$
Reverse Voltage (反向电压)	V_R	70	V
Operating Temperature Range (工作温度)	T_{OPR}	-30°C To $+60^{\circ}\text{C}$	
Storage Temperature Range (储存温度)	T_{STG}	-40°C To $+85^{\circ}\text{C}$	
Manual Soldering Temperature (手工焊接温度)	T_{SOL}	$350^{\circ}\text{C} \pm 20^{\circ}\text{C}$ For 3 Seconds	
ESD Sensitivity (抗静电能力)	ESD	3000V HBM	

Notes:

[1]. Tolerance Θ :10% (Θ 公差为 10%)

[2].1/10 Duty Cycle 0.1ms Pulse Width. (脉冲宽度 0.1ms, 占空比 1/10)

深圳市乐的光电照明有限公司

shen zhen ledi lighting optoelectronic Co.,Ltd

(2) Electro-Optical Characteristics


at Tc=25°C

光电特性 Tc=25°C

Parameter参数	Symbol符号	Condition 条件	Min.	Typ.	Max.	LM/W (typ)	Unit 单位
Forward Voltage 正向电压	VF	IF=150MA	18	19	20	—	V
Luminous Flux 光通量	Φv	TC=6000-6500K	350		380		Lm
		TC=4000-4500K	340		370		
		TC=3000-3200K	330		350		
CRI 显色指数	Ra	IF=150MA	80	—	—	—	—
Thermal Resistance 热阻	R (j-c)	IF=150MA	—	2	—	—	°C/W

6.Product bins 产品分级

Chromaticity bins

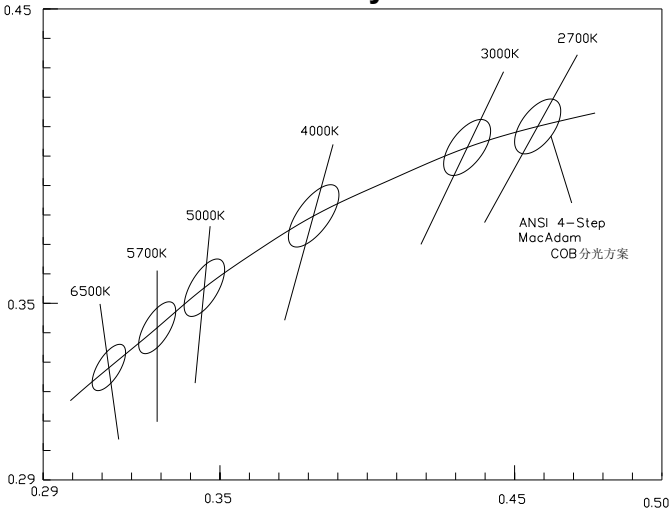

Center TC	2725K	3045K	3985K	5028K	5665K	6530K
X, Y	0. 4578, 0. 4101	0. 4338, 0. 403	0. 3818, 0. 3797	0. 3447, 0. 3553	0. 329, 0. 3417	0. 3123, 0. 3282

Notes for Table

*1.Color bins are defined at IF=150mA operation. If use different forward current, it will cause the change of chromaticity and forward voltage.

该产品通过瞬态150mA 点亮，分光分色. 若使用不同电流，会引起色温及电压的变化

*2.The tolerance of measurement at our tester is VF+/-3% , Φv+/-10% and Ra+/-2.

测试仪测量的公差在电压±3% , 流明±10% 和显指±2 。

3.Tolerance of ±0.005 on x,y coordinates.

色坐标的测量误差允许在±0.005


4.Color region stay within MacAdam "3-step" ellipse from the chromaticity center. but does not contain the color temperature 6000±300K. The chromaticity center refers to ANSI C78.377-2008.

色域可控制在色温中心坐标的3阶麦克亚当椭圆之内，但不包括色温6000±300K，色温分bin参考ANSI C78.377-2008。


深圳市乐的光电照明有限公司

shen zhen ledi lighting optoelectronic Co.,Ltd



7.Characteristics特性

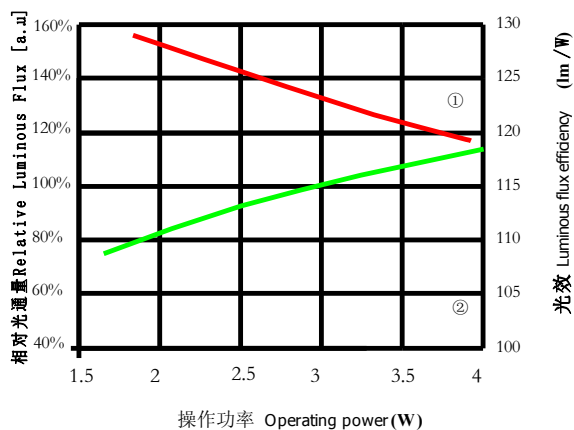

① ——— 操作功率对应相对光通量 ② ——— 操作功率对应光效

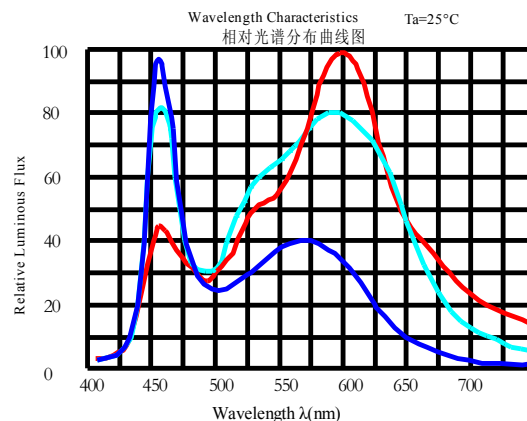

— Cool White正白光 — Neutral White中性白光 — Warm White暖白光

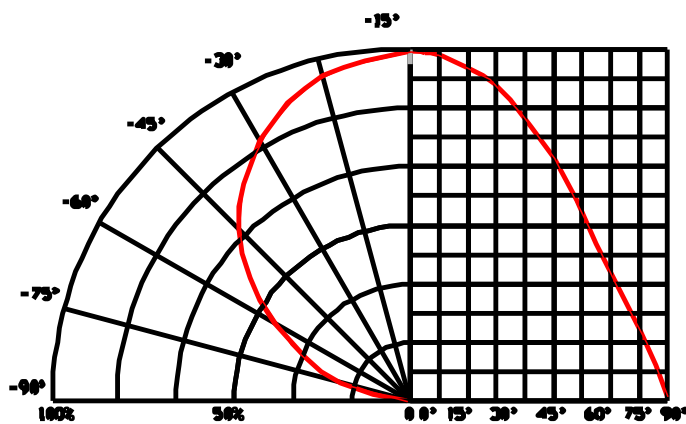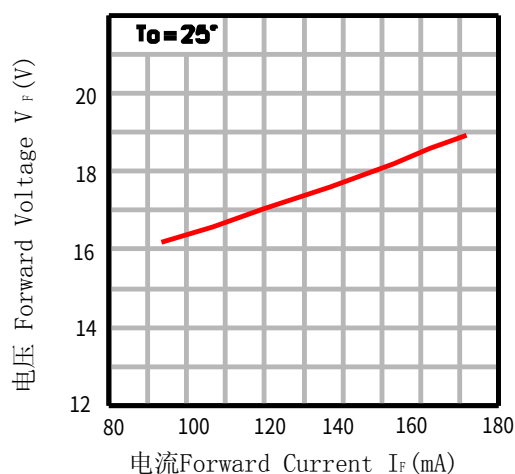

深圳市乐的光电照明有限公司

shen zhen ledi lighting optoelectronic Co.,Ltd

8.Packing Specifications 包装规格




Label on ESD shielding 静电袋上标签

Lop:Luminous Flux rank 光通量档次范围



VF:Forward current rank 正向电流

CCT:Color temperature 色温


■ Packing figure 包装图





Tray: 80pcs



7Tray/ ESD Shilding Bag:560 pcs

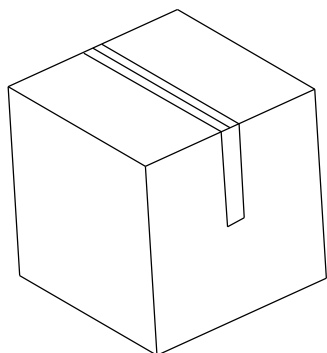

5Inner Box/Outer Box:2800pcs

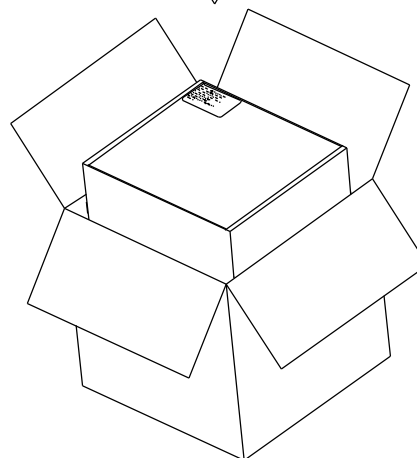

ESD Shilding Bag/Inner Bo x:560pcs

深圳市乐的光电照明有限公司

shen zhen led lighting optoelectronic Co.,Ltd

Precaution for use (防护措施)

1. Storage储存

To avoid moisture, we recommend storage conditions for the unopened LED $+5 \sim +30^{\circ}\text{C}$, relative humidity $<60\%$. LED should be used within 168 Hrs. of opening the package. Please make sure to dehumidify and vacuum pack the remaining/ unused LED. Dehumidifying condition: $+120^{\circ}\text{C} \pm 5^{\circ}\text{C}$, 04 Hrs. Effective age for the sealed led is one year. 为避免受潮的影响，我司建议产品在未开包装前储存条件为 $5-30^{\circ}\text{C}$ ，相对湿度小于 60% 。已开包装的 LED 光源请在 168H 内使用安装完毕，如未用完之产品，请进行除湿并抽真空后密封保存。除湿条件： $120^{\circ}\text{C} \pm 5^{\circ}\text{C}$ ，4H。产品密封保存有效使用期为一年。

2. The soldering precautions 组装注意事项：

Soldering conditions: Reflow soldering is not recommended for this LED. If hand soldering, set soldering iron temperature at 350°C and soldering time not More than 5 seconds, after the first soldering, make sure the substrate surface temperature returns to ambient temperature before a second soldering. Please make sure when soldering, there is no external force on the soldering surface (such as pressure, friction or sharp metal nails, etc.), to avoid gold wire deformation or damage and other abnormalities. If beyond recommended conditions, we cannot guarantee the LED stability, please do the risk assessment first. 焊接条件：此产品不推荐使用回流焊接的作业方式，手工焊接烙铁温度设定 350°C ，焊接时间不可超过 5 秒，第一焊点焊接后请确保基板表面温度恢复到环境温度，方可进行第二次的焊接。焊接时请注意不可有外力作用于胶体表面（如压力，摩擦或锋利金属钉等），以免造成金线变形或断线等异常；如果超出此使用条件，本司将不能保证产品的稳定性，如需使用超出的操作条件，请务必进行风险评估。

3. Anti-Static Measures 防静电措施：

Please take adequate measures to prevent electrostatic generation, such as wearing electrostatic ring or anti-static fingerstall etc; any relative products like plant equipment, machinery, carrier and transportation units shall be connected to discharging unit/ ground. The ESD sensitivity of this product is $> 1000\text{V}$, after assembly the final lamp, please make sure to discharge Static Electricity by proper ESD equipment. 请采取足够的措施来防止静电产生，比如带静电环或防静电手指套等；每个制造厂关于产品（工厂、设备、机器、载波机和运输单位）应当连接到底面，请避免产品电气带电；本产品的防静电敏感度超过 2000V ，装配后的最终灯具产品（S）建议检查是否损坏LED（漏电现象）。

深圳市乐的光电照明有限公司

shen zhen ledi lighting optoelectronic Co.,Ltd

4. Temperature Control温度控制：

Recommended temperature conditions for enhanced product life: TS (Cathode Point) is $<85^{\circ}\text{C}$ and glue surface temperature $<160^{\circ}\text{C}$. During assembly, please ensure that a good quality thermal paste is applied and distributed evenly over the surface. While using thermal pad (Heat Sink), make sure LED is firmly tightened and there is no gap between surfaces. This product Heating conditions, tested at 500V with medium surface contact.保证散热前提条件为：TS点（负极焊盘）为85度以下，胶体表面温度小于160度。在此温度以下，散热符合产品寿命要求；为确保在组装时降低接触热阻，请注意导热膏涂布均匀且分布面积合理，不可出现导热膏太少或涂抹高低不平等现象。如使用导热胶垫时，请确保该螺丝安装后基板与导热胶垫的完全接触，不可存在中空现象。以上散热介质耐压测试至少通过500V。


5. The drive control驱动控制：

Drive this product at constant current. Output current range specifications should be according to the operational and other conditions, as mentioned in data sheet. Before using a constant voltage source or altered specifications other than recommended, please consider risk factors. 本产品需使用恒流源进行驱动，且输出电流符合规格书上的功率使用范围，如需使用恒压源或其他使用条件，请进行使用效果风险评估。


6.Other其他：

Product is not suitable to use in following conditions本产品不可在以下条件下使用，如果产品在以下条件下使用，评估其使用效果和风险是有必要的：

- Direct or indirect wet / damp conditions, such as rain, etc.;
- 直接或间接的打湿或受潮，比如淋雨等；
- In contact with sea water and erosive materials
- 被海水损害或侵蚀；
- Exposed to corrosive gases (e.g., Cl_2 , H_2S , NH_3 , SO_x , NO_x , etc.);
- 被暴露于腐蚀性气体(如 Cl_2 , H_2S 、 NH_3 、 SO_x 、 NO_x 等)；
- Exposed to dust, liquids or oils;
- 被暴露于粉尘、液体或油；



OK



NG